

Important User Instructions

GENERAL:

Both EN358 and ANSI 10.14 require users to be trained by a competent person before this harness is used on the job. Each system shall be inspected every six months according to the manufacturer's recommendation and the date of each inspection shall be recorded on the metal tag attached to the harness. Equipment showing any defect shall be withdrawn from service immediately. All fall protection systems subjected to impacts caused by a free fall or by testing shall be removed from service and should not be used again.

INSPECTION:

Each unit shall be visually inspected for defects prior to each use and particular attention should be directed to the following potential defects: (A) cuts, (B) cracks, (C) tears or abrasions, (D) undue stretching, (E) damage due to deterioration, (F) mildew, (G) operational defects, (H) contact with heat, (I) acids or other

Frayed threads

corrosives,

(J) damaged or distorted snap hooks or faulty springs. Equipment showing any defect shall be withdrawn from service immediately.

Exposed cable

All Lewis Manufacturing Company safety equipment is inspected for quality assurance according to ANSI/ANQC Q9003-1991. The Type TB belt also meets or exceeds the specifications of ANSI 10.14 (1991). The large metal tag riveted to the harness waist belt shows ANSI compliance. This tag is also used to register a permanent record of belt/tail rope inspection. A qualified person must inspect this safety device twice a year using the listed potential defects as a reference. The month and the year of inspection is recorded by marking

the correct raised letter or number on the tag using a small hammer and a tool such as a center punch.

The smaller tag denotes the following:

1. The individual serial number of the item.
2. The type as it appears in our catalog (EX. TYPE SC) (EX. TYPE TR-10-D-PC).
3. The work load of that particular item.

The item in this box can be identified by referring to the following information:

Serial No. _____

Type: _____

Inspected By: _____

Date: _____

The fabric label attached to the belt indicates the EN358: 1992 number which the systems have also been proven to meet or exceed.

Do not alter this belt in any way. Failure to use this belt properly may result in serious bodily harm.

STORAGE OF EQUIPMENT:

Each unit should be stored in a cool, dry place and not subjected to direct sunlight.

CLEANING INSTRUCTIONS:

1. Belt may be cleaned using warm water and a mild detergent.
2. Dry naturally, away from direct source of heat.

Please keep this form along with the certification on file for the life of the products you are using. It is very important that these guidelines be followed in order to avoid serious injury or even death. If you have any questions regarding the use or inspection of any Lewis Manufacturing Company equipment, please feel free to call us collect at any time at (405) 634-5401.



Inspect Lewis Safety Belts and Tail Ropes twice yearly. Record inspection dates on metal tags attached to safety belts and tail ropes.

Do not alter any Lewis Manufacturing equipment in any way. Lewis Manufacturing does not assume any liability for accident or injuries resulting from a field-repaired or altered belt.



P.O. Box 95089 • 3601 S. Byers
Oklahoma City, OK 73143

(405) 634-5401


Fax: (405) 632-8608



Now accepting
Visa and
MasterCard.



Instruction Manual

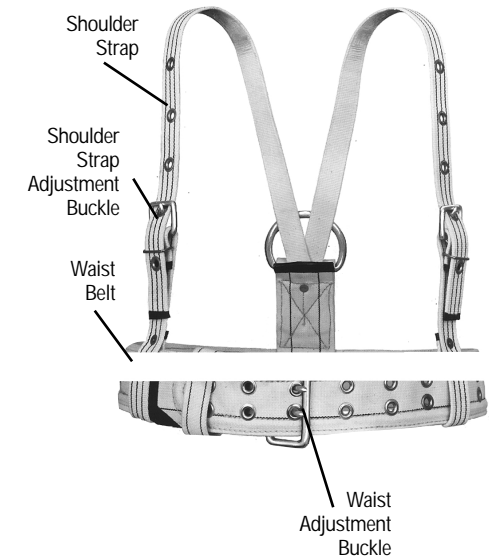

Type TB Derrick Belt